

Economy wall mounting

Introduction

Generator control panel with integral circuit breaker suitable for wall mounting or set mounting on a frame.

Hinged front access door and removable gland plates to the top and base.

Manufactured from folded and welded zinc coated steel plate. Finished in grey RAL7032.

Each panel comes complete with a schematic drawing.



Standard features 3 phase panels

- 1 x Voltmeter 72 din
- 1 x Voltmeter selector switch (7 position)
- 3 x Ammeters 72 din
- 3 x Current transformers (above 100 amps)
- 1 x Circuit breaker 3 pole
- 3 x Instrument fuses

Standard features 1 phase panels

- 1 x Voltmeter 72 din
- 1 x Ammeter 72 din
- 1 x Current transformer (above 100 amps)
- 1 x Circuit breaker 2 pole
- 1 x Instrument fuse

Optional extras

- Hours counter
- Frequency meter
- Key switch
- Key switch and charge indicator
- Key start modules
- Remote start modules
- Auto start modules
- 2A static charger (for Listers)
- 3A automatic battery charger
- Slave relays 20/30A (fuel and starter)
- Oil pressure gauge and sender
- Water temperature gauge and sender
- Charge ammeter
- Battery voltmeter
- 10A heater switch, fuse and indicator
- Emergency stop pushbutton

Modules are fused and fully wired to din terminals.

Where more optional extras are required check out the analogue and digital range.

GENPART (UK) LTD

Tel: +44 (0)1953 882436

Fax: +44 (0)1953 885597

e-mail: sales@genpart.co.uk


<http://www.genpart.co.uk>

Unit 5, Threxton Road Industrial Estate, Watton, Thetford, Norfolk, IP25 6NG, England

E. & O. E.

We reserve the right to amend specifications without prior notice.

Issue 2 (02/05/01)




Economy wall mounting

Specifications

All components meet relevant European standards and regulations.

Panel meters	IEC51 BS89 IP52 -25+50°C
Ammeters/voltmeters	Class 1.5
Frequency meters	Class 0.5
Selector switches	IEC73, 529
Circuit breakers; MCB	BSEN 60898
MCCB	IEC 947-2

Dimensions

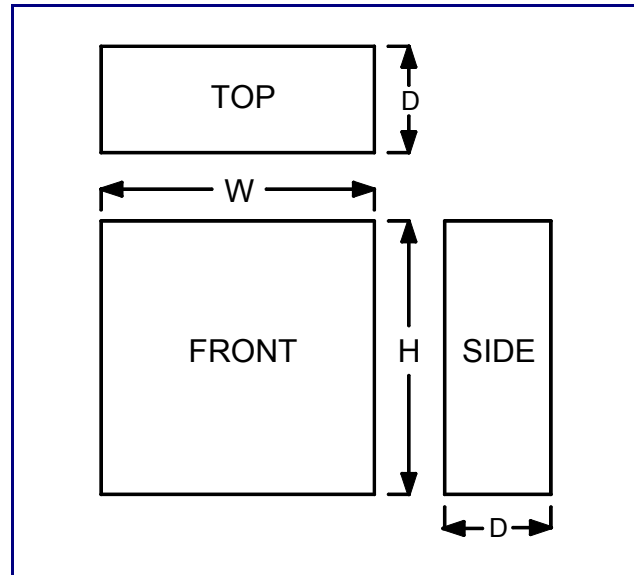

	H	W	D
0-125A	400	400	200
160-250A	500	400	250

NOTE: Certain combinations of additional options may require a larger enclosure.

GENPART (UK) LTD

Tel: +44 (0)1953 882436 Fax: +44 (0)1953 885597 e-mail: sales@genpart.co.uk <http://www.genpart.co.uk>

Unit 5, Threxton Road Industrial Estate, Watton, Thetford, Norfolk, IP25 6NG, England

E. & O. E. We reserve the right to amend specifications without prior notice. Issue 2 (02/05/01)